

SC-200II

NAKAMURA-TOME
PRECISION INDUSTRY CO.,LTD.



Next level
machining

Innovative
Technology

~Creating new values~

SC-200II

The advance of SC-200!
With a highly rigid slant bed with box way slides, suitable for
heavy cutting and high precision machining.
8" class single-turret machine capable of performing one-rank
higher machining.

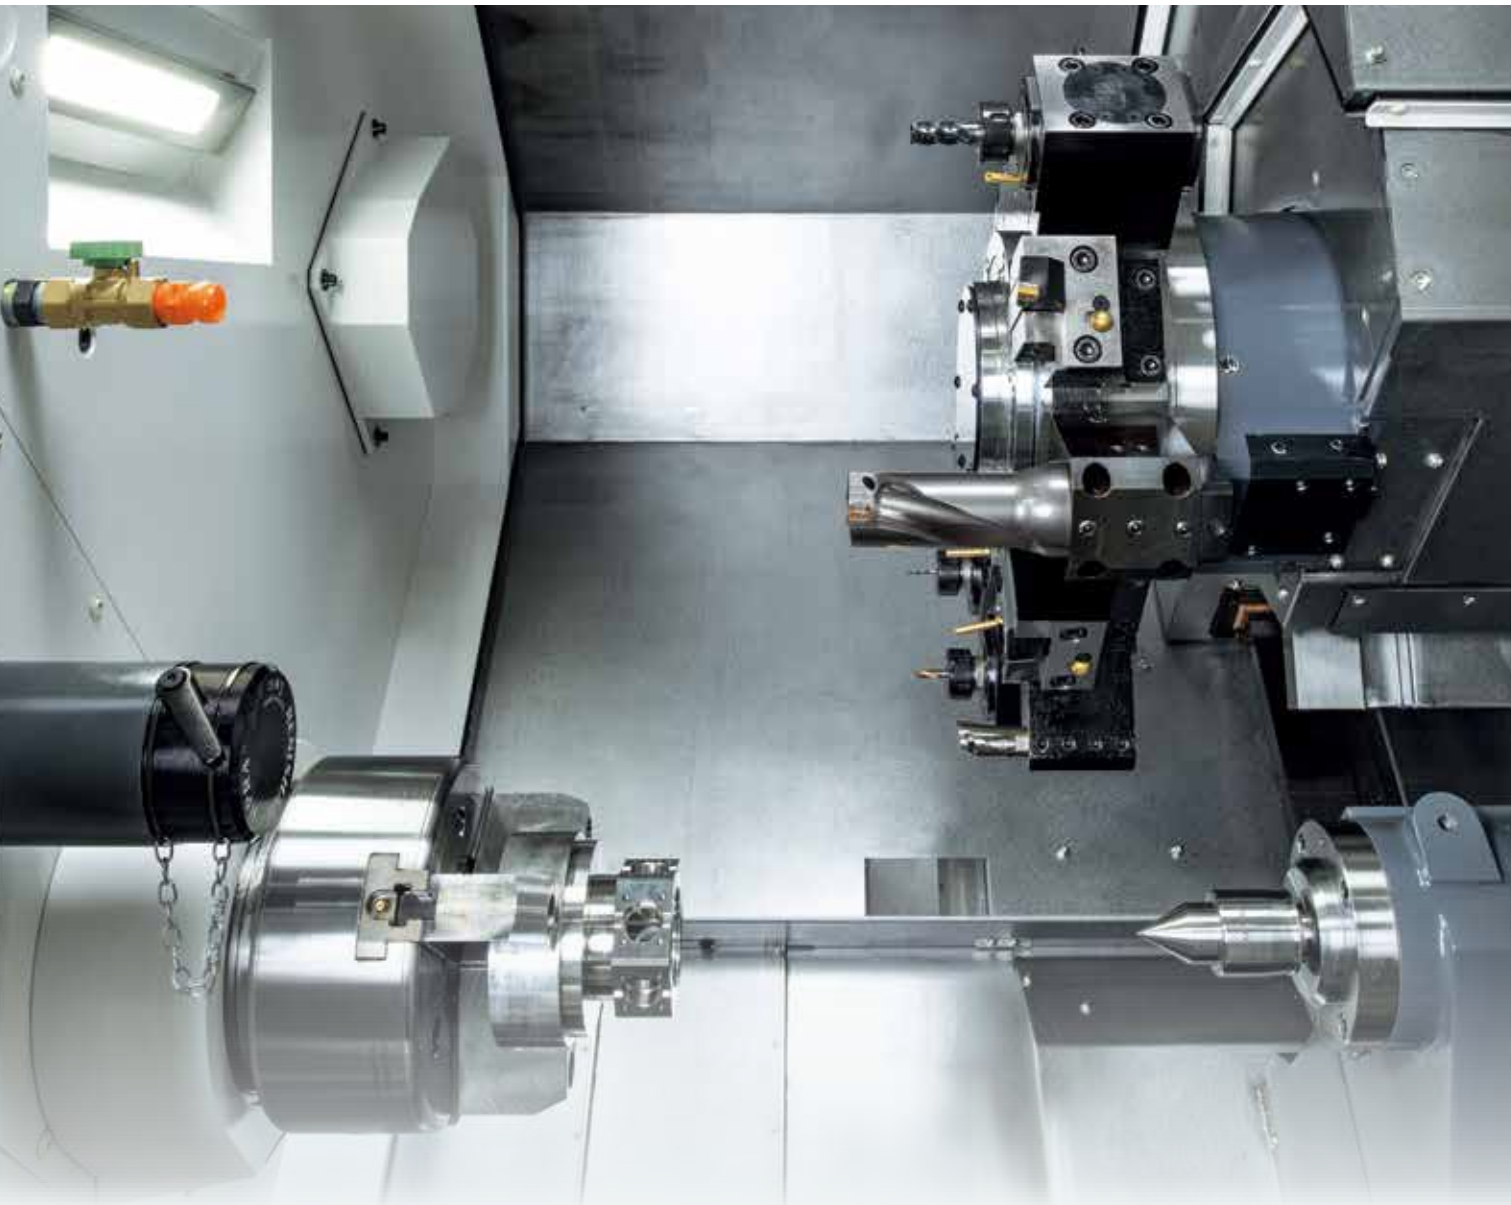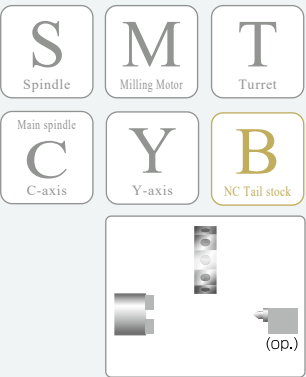

Next level machining

It carries out great machining rigidity and stability, with a highly rigid slant bed with box-way slides.

Although it is an 8" class machine, it holds a maximum turning diameter of 390mm and a tool swinging diameter of 620mm, thus ensuring a machining area equivalent to that of a 10" class machine.

The output of the spindle motor has been increased to 15/11kW (Op. 18.5/15kW) making it superior to the previous model. In addition to the improved spindle motor output, the Bar capacity and Y-axis slide travel have also been improved to give it the ability to achieve one-rank higher machining capacity.

Easier to use, more efficient
Next level machining

■ Main spindle

Standard		Option	
Bar capacity	Φ65mm	Bar capacity	Φ71mm
Spindle speed	4,500min ⁻¹	Spindle speed	4,500min ⁻¹
Standard		Option	
Spindle motor	15/11kW	Spindle motor	18.5/15kW

■ Turret

Standard		Option	
Y axis slide travel	±50mm	Type of turret head	Dodecagonal
Milling spindle speed	6,000min ⁻¹	Number of milling stations / Number of indexing positions	12 / 24
Milling motor	5.5/3.7kW	Type of turret head	Hexadecagon
		Number of milling stations / Number of indexing positions	16 / 16

Milling and Y-Axis standard




NC tailstock(op.)

The Tailstock body movement is program controlled by the NC control servo drive. The setting can be easily done on the NT NURSE screen for a maximum of 12 settings.



■ Tailstock(op.)

Option	
Driving system	NC control servo-driven type
Quill taper	MT-4(Rotating center), MT-3(Built-in center)
Range of thrust force	2.5 - 6.5kN

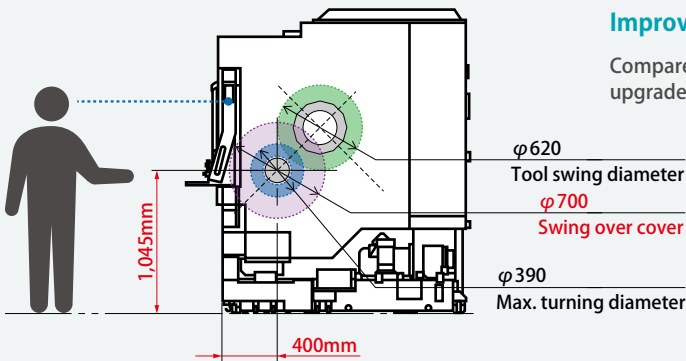

Improved swing, and machining diameters

Compared to the previous model, the machining product range has been upgraded, giving it the ability to perform one-rank higher machining.

Stress-free

For best accessibility, the distance from machine front to spindle, and the spindle height have been improved. The control panel height was designed for optimum operator comfort. Ergonomically designed for a more comfortable posture.

Nakamura-Tome FANUC
Oi-TF Plus
15 inch touch screen

With a movable operation panel, the angle can now be adjusted by the operator.



Tool setter(op.)

Can be configured for a detachable, or for an automatic swing-down type tool setter.



Chip conveyor(op.)

Can be configured for ejection from the side or from the back.

GR-203 High-Speed(op.)

The whole process from loading a blank material to unloading a finished part can be automated.

* The image is of NTY3-100.



Parts catcher type A(op.)

Discharging of remnants and finished parts can be automated.



Option	
Diameter	φ15 - φ71mm
Length	30 - 150mm
Weight	0.1 - 1.5kg

User friendly

Redesigned to make it easier to refill the lubrication oil tank.



■ Capacity		φ65	φ71(op.)
Max. turning diameter	12st	390mm	
	16st(op.)	340mm *1	
Distance between centers(op.)		max.510mm / min.205mm	
Max. turning length		317.8mm	
Bar capacity		φ65mm	φ71mm
Chuck size		8"	10"

■ Axis travel

X-Axis slide travel	242mm
Z-Axis slide travel	375mm
Y-Axis slide travel	±50mm *2

■ Rapid feed

X-Axis rapid feed rate	24m/min
Z-Axis rapid feed rate	36m/min
Y-Axis rapid feed rate	6m/min *2

■ Main spindle

Spindle speed	4,500min ⁻¹	4,500min ⁻¹
Spindle speed range	Stepless	Stepless
Spindle nose	A2-6	A2-6
Hole through spindle	80mm	80mm
I.D. of front bearing	110mm	110mm
Hole through draw tube	66mm	72mm

■ C-axis

Least input increment	0.001°
Least command increment	0.001°
Rapid speed	600min ⁻¹
Cutting feed rate	1 - 4,800° /min
C-axis clamp	Disk clamp
C-axis connecting time	1.5s

● Safety quality specifications

Various interlocks, such safety fences, auto extinguisher devices, and other safety related equipment may be required. These have to be selected during the configuration of the machine.

① Safety devices include electromagnetic door lock, chuck interlock, hydraulic pressure switch, air pressure switch, short circuit breaker and quill interlock.
(Door interlock and chuck interlock are standard equipment.)

② In the case of automation, various safety fences may be required, such as work stocker safety fences, robot safety fences, etc.

During the configuration of machine specifications, please discuss these requirements with the Nakamura-Tome machine sales representative.

● Precautions on the use of cutting fluids and lubricating oils

Some types of cutting fluids (coolant) are harmful to machine components, causing damages such as peeling of paint, cracking of resin, expansion of rubber, corrosion, and rust build-up on aluminum and copper.

To avoid causing damage to the machine, never use synthetic coolants, or any coolants containing chlorine. In addition, never use coolants and lubricating oils which contain organic solvents such as butane, pentane, hexane, and octane.

■ Turret

Type of turret head	12st	Dodecagonal
	16st(op.)	Hexadecagon *1
Number of Indexing positions	12st	24
	16st(op.)	16 *1
Tool size (square shank)		□20mm, □25mm
Tool size (round shank)		φ25mm, φ32mm

■ Milling

Rotary system		Individual rotation
Milling spindle speed		6,000min ⁻¹
Spindle speed range		Stepless
Number of milling stations	12st	12
	16st(op.)	16 *1
Tool size		Straight holder φ1mm ~φ16mm
		Cross holder φ1mm ~φ16mm

■ Tailstock (op.)

Driving system	NC control servo-driven type
Travel	305mm
Rapid feed	8m/min
Quill taper	MT-4(Rotating center), MT-3(Built-in center)
Quill diameter / Quill stroke	-
Range of thrust force	2.5-6.5kN

■ Drive motor

Main spindle motor	15/11kW , 18.5/15kW(op.)
Milling motor	5.5/3.7kW

■ General

Height	2,125mm
Max. height of movable part	2,225mm
Floor space (L x W)	3,195mm × 1,967mm
Machine weight (incl. control)	7,500kg

■ Power requirements

Power supply	24.0kVA (Main spindle 15/11kW)
	27.3kVA (Main spindle 18.5/15kW)

*1 16st cannot be selected for specifications without milling

*2 Y-axis cannot be selected for specifications without milling

With or without Y-axis can be selected for specifications with milling



<https://www.nakamura-tome.com>

Netsuno 15, Hakusan city, Ishikawa, 920-2195 Japan
Phone : +81 76 273 8100 Fax : +81 76 273 4312
E-mail : nt-jpn@nakamura-tome.co.jp

* This catalog was published in April 2024.
Specifications, illustrations and data given herein are subject to change without notice.

* The products in this catalog are controlled by Japan's "Foreign Exchange and Foreign Trade Law". The export of the products is subject to an export license to be issued by the Japanese government.